



Quanta-Ray Lab Series Pulsed Nd:YAG

Power Specifications													
Model ¹	LAB-130-			LAB-150-			LAB-170-			LAB-190-*			
Rep Rate (Hz)	10	30	50	10	30	50	10	30	50	10	30	50	100
Energy (mJ/p) ²													
1064 nm	450	275	200	650	500	300	850	700	550	1000	800	600	325
532 nm	200	100	70	300	200	100	450	325	210	500	400	250	120
355 nm	90	40	30	150	100	40	220	175	100	250	200	100	50
EEO-355	—	—	—	—	—	—	240	—	—	300	—	—	—
266 nm	50	25	15	70	35	25	90	60	30	110	60	25	20

Performance			
Wavelength	Pulse Width ⁴	Short Term Energy Stability ⁵	Long Term Power Drift ⁶
1064 nm	8-12 ns	± 2%	< 3%
532 nm	1-2 ns < 1064 nm	± 3%	< 5%
355 nm	2-3 ns < 1064 nm	± 4%	< 6%
266 nm	3-4 ns < 1064 nm	± 8%	< 10%

Mode			Pulse	
Spatial Mode Profile ⁷	Standard Fit	ESM Fit ⁸	Line Width ⁹	
Near Field (1m)	> 70%	> 85% ± 5%	Standard	< 1.0 cm ⁻¹
Far Field (∞)	> 95%	> 95%	Injection Seeded	< 0.003 cm ⁻¹
Modulation ¹⁰	< 40%	> 20%		
Beam Diameter ¹¹	< 10 mm	—	Timing Jitter ¹²	< 0.5 ns

Beam Specifications	
Pointing Stability ¹³	< ± 50 μrad
Beam Divergence ¹⁴	< 0.5 mrad
Lamp Lifetimes ¹⁵	30 million pulses
Remote Control	Analogue

diagnostic system. 70% refers to the correlation between the actual beam profile and the best least squares fit Gaussian profile. Far field profiles are measured at the focal plane of a 2 m focal length lens.

- Enhanced spatial mode options can be tailored to meet your application needs. To obtain > 85% Gaussian fits, energy can be reduced by 30%.
- Insertion losses for systems using the Model 6350 injection seeder are < 15% at 1064 nm, 532 nm, and 266 nm.
- Refers to the maximum deviation from the best-fit Gaussian profile measured in the near field (1m) between the FWHM points.
- Actual beam diameter will vary depending on laser configuration.
- rms jitter from Q-switch sync pulse. Jitter is ≤ 1 ns rms when using the model 6350 injection seeder at 10 Hz, ≤ 1.5 ns at 30 Hz, and ≤ 2 ns at 50 Hz.
- Long term average pointing drift after warmup, over 8 hours ± 3°C. Shot to shot pointing stability < ± 25 μr.
- Full angle measured at FWHM points.
- IR energy within 10% of specified value.

* LAB -190-10 is also available as a PRO-190-10 with BeamLok option. For laser head size please refer to PRO datasheet.


- All specifications, unless otherwise stated, are for Q-switched 1064 nm operation, and are subject to change without notice.
- Harmonic energies are specified after separation using dichroic mirror pairs. 532 nm energies are specified using type II second harmonic generation (SHG). 355 nm energies are specified using type II SHG. A 10% increase in 355 nm energies can be specified when type I SHG is used.
- High UV output option designed for OPO pumping, including injection seeder, harmonic generator, 355 nm dichroic separators, and beamdump.

- Normal full width half maximum (FWHM) pulse width 8-10 ns except LAB-130 and 190 10 Hz versions, which will be 9-12 ns. The short pulse mode, standard on all LAB series lasers, reduces the 1064 nm pulse width to approximately 2.5 ns and reduces the energy by approximately 10%. (Short pulse mode available on seeded versions on special request only).
- Pulse to pulse stability for > 99% of pulses, measured over a 1 hour period.
- Over an 8 hour period with temperature variations of less than ± 3°C.
- Near field spatial profiles measured 1 m from laser using a commercially available beam

Quanta-Ray Lab Series Pulsed Nd:YAG

Service Requirements	
Water Service	10 Hz ¹⁶ , 30 Hz and 50 Hz - 7.6 liters/min (2.0 US gal/min) ¹⁷
Electrical Service	10 / 30 / 50 Hz: < 35A / < 40A / < 55A
Voltage ¹⁸	190 - 260 V, single phase, 50/60 Hz
Umbilical Length	3m (10 ft.)
Remote Cord Length	3m (10 ft.)
Weight	Head 55 kg (120 lb) Power Supply 68 kg (150 lb)



16. Lab 130-10 and 150-10 Hz units are air cooled as standard. Water cooled versions require WAT 100 (3.8 liters/ min. or 1.0 U.S. gal/min.) All seeded lasers must be water cooled.
17. Minimum pressure 40 psi. Maximum pressure 60 psi.
18. Input transformer has taps at 190, 200, 210, 220, 230, 240, 250, and 260 V. Once tap is chosen, actual input voltage differing by more than $\pm 10\%$ may affect operation of laser.

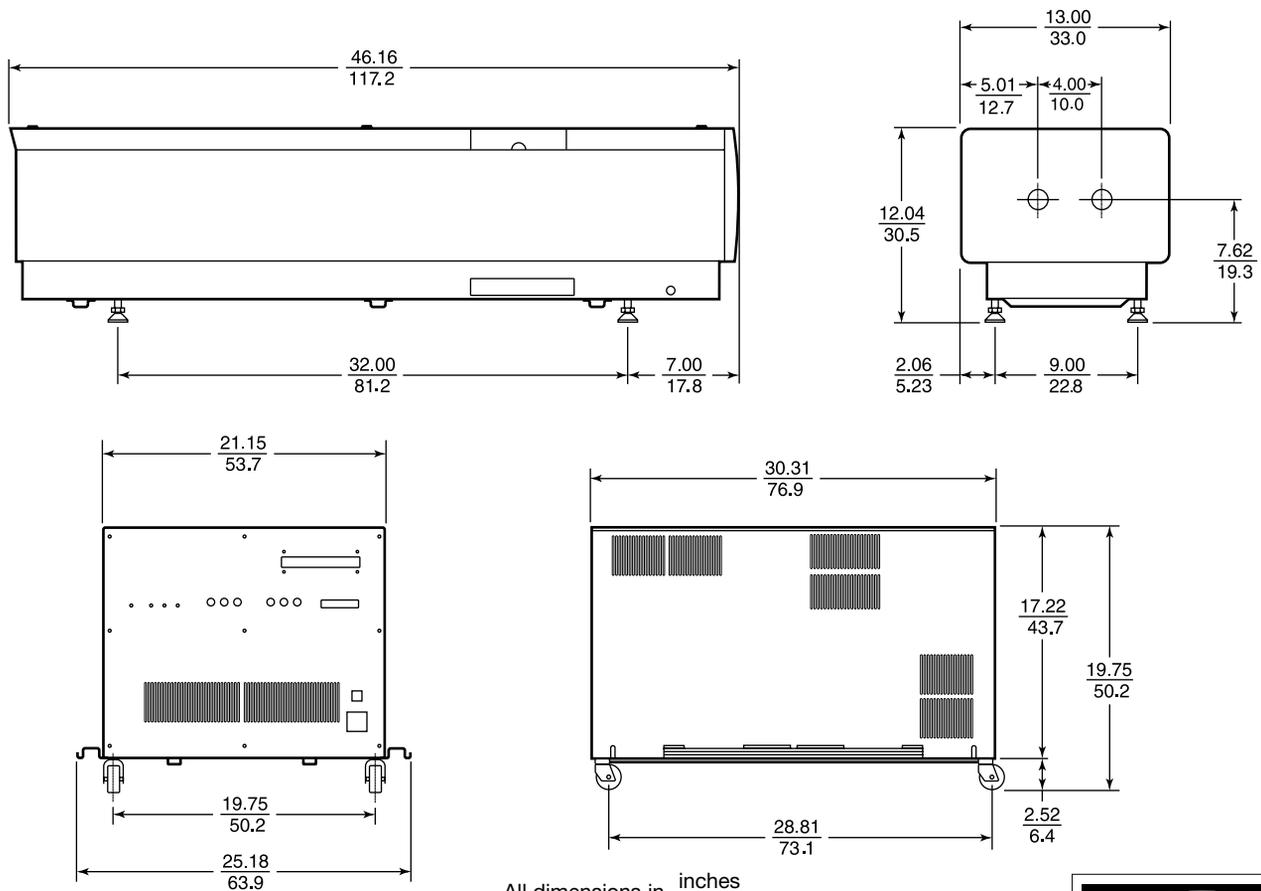

All dimensions in inches
cm



The Solid State Laser Company™



1335 Terra Bella Avenue
Mountain View, CA 94043
1-800-SPL-LASER (1-800-775-5273)
(650) 961-2550
Fax: (650) 964-3584
e-mail: sales@splasers.com
http://www.spectra-physics.com

Australia: (08) 84 43-8668
Benelux: +31 (40) 265 99 59
China: (010) 62562934
France: +33 (1) 69 18 63 10
Germany: +49 (6151) 708-0
Hong Kong: (02) 523-5688
India: (080) 6651 465

Israel: (03) 635 6650
Italy: (02) 57 46 51
Japan: Tokyo (03) 3794-5511
Osaka: (06) 6941-7331
Netherlands: (040) 2659959
S. Korea: (02) 587-8727
Spain: (91) 3775006

Sweden: (08) 550 10403
Taiwan: (02) 7678890
UK: +44 (14) 42 25 81 00
Other European
Countries: +49 6151-708-219
Other Pacific
Countries: +1 650 966-5628
+1 650 966-5693

©2001 Spectra-Physics Lasers, Inc. Printed in U.S.A. 06/01 000B-0173S